

03

Intro

05

Philosophy

08

Prestige technology

10

Smart technology

12

Green technology

14

Design

20

Core advantage

22

Key features

30

Performance

32

Network



Elevate to The Exclusive Leader

Hyundai Elevator

The sole elevator is for a building
of unrivaled height.

THE EL, an ultra high speed elevator that enables
you to experience the most advanced technologies and
class, achieves previously unimagined heights and
unfolds a new reality before your eyes.

THE EL, realizing more unique greater value,
offers you new technologies,
for the environment and safety.



BRAND IDENTITY
THE EL : The Exclusive Leader

SPEED
300mpm ~ 1080mpm

RISE
600m (More than 150 floors)

The overwhelming performance of THE EL that is proven by its "world's first, world's best" records.

THE EL embodies the meanings 'the only' and 'unrivaled', and aims to become the only ultra high speed elevator in its class.

The Exclusive Leader

A man in a dark suit is shown from the chest up in profile, looking out over a dense city skyline. The skyline is filled with various skyscrapers of different heights and architectural styles. The sky is a pale, hazy blue. The overall tone is professional and aspirational.

Your expectations will be elevated **AFTER** experiencing **THE EL**

A Product of Cutting-Edge, Smart Operation, Green Technology

From the world's most advanced technologies
to a smart operation system and green technologies.
THE EL is the best solution for enhancing the value of the
ultra high rise building that you are planning and designing.

An encounter with THE EL will substantially raise your
standard for ultra high speed elevators.

Core
Technology





PRESTIGE TECHNOLOGY

The world's highest speed and sophisticated technologies
make your imagination come true.

Cutting-edge technology only for you, THE EL.



PRESTIGE TECHNOLOGY

01



The fastest speed in the world

Ultra high speed, nine-phase synchronous motor

THE EL has the heart of a fault tolerance design, a nine-phase multi-motor that is a three sets combination of three-phase synchronous motors. Even if there is a problem with some parts, the elevator remains fully operational, improving safety and service.

Noise, Vibration, Harshness (N.V.H) technology

The streamlined capsule structure, which minimizes air resistance, and the vibration control system remove even the slightest noise and vibration, offering a comfortable, smooth riding experience.

Atmospheric pressure controller

By controlling atmospheric pressure fluctuations caused by altitude change, the controller minimizes ringing in the ears. This enables a comfortable riding experience even inside an ultra high rise building.

The Hyundai Asan Tower, an ultra high speed elevator test tower

The Hyundai Asan Tower has the world's fastest elevator, with a speed of 18mps (1,080mpm). Here, the safety and reliability of ultra high speed elevators are proven in an environment that is most similar to an ultra high rise building. The Hyundai Asan Tower is opening a new horizon in the development of the world's top-notch elevator systems.

Aerodynamic
DESIGN

600^{RISE}
m

9^{3-phase motor x 3Set}
MULTI
MOTOR

World Best
Speed 1,080^{mpm}

SMART TECHNOLOGY

All spaces within your building are pleasant and convenient, but the elevator will be remembered as being much more.

THE EL, offering smart technologies.

SMART TECHNOLOGY

02



The next generation of intelligent operating system

IBS (Intelligent Building System)

IBS creates a smart spatial culture in connection with the building's security and management system. You can receive high-quality services based on IT convergence technologies within a top-class building.

Destination selecting system (Destination floor reservation system)

This is a system where you register your destination floor at a landing and the most appropriate elevator is automatically serviced. This enables maximum operational efficiency.

Artificial intelligence-based group control system

Artificial intelligence-based analysis of traffic volume enables estimation of future traffic volume and patterns and necessary preparations. Optimal group management is allowed, leading to efficient control of elevator operations.

Remote monitoring system

Remote monitoring of the elevator operation status all across the nation 24/7 prevents breakdowns and accidents.

Intelligent Cutting-edge security and
management system
Building System

iGC-3000 GROUP
CONTROL SYSTEM

Reduces waiting
time and energy
consumption *Destination* SELECTING
SYSTEM



GREEN TECHNOLOGY

Inside THE EL, you are able to concentrate on your business only without any doubt in environment or energy. THE EL, already made with green technology.



25%
Lower energy consumption

Received "A" class energy efficiency certificate of VDI 4707

30%
Lower electricity use

A CLASS

77.5% RECYCLE ENERGY
Energy use improved by reuse of electricity

GREEN TECHNOLOGY

03



"A" class Energy Efficiency

First in the world to receive a grade of A from Tüv, German Institute

Energy efficiency rating (VDI 4707 Part1) involves giving international certification after assessing an elevator's operation time, energy consumption, and average operation distance. THE EL became the first in the world to receive the A class (the best-in-class system) in the ultra high speed elevator (600mpm) category.

Energy recycling inverter

THE EL has a energy recycling inverter, which reuses energy that is generated during operation, resulting in increased energy efficiency of up to 77.5%. There is no charging or braking resistance area, which minimizes the emission of carbon. THE EL features leading green technology.

Ultra lightweight, ultra slim green technology

The permanent magnet synchronous motor of THE EL has an ultra slim and lightweight design, resulting in reduced machine room construction costs. It also consumes 25% less energy compared to induction motors.

Green process

Hyundai Elevator develops environmental-friendly elevators for customer satisfaction through a design and material development process that reduces environmental pollution. Hyundai Elevator is continually developing low electricity-consuming products and reducing the amount of materials used in the production process in line with customers' 'well-being' demands, thereby taking the lead in environment-friendly technologies.



ENTRANCE


- Landing Door** STS Bead Blast
- Jamb** Flush Type, STS Bead Blast
LED Lighting
(Arrival Announcement System)
- Hall Button** Destination Selecting System
(Box Type)
- Hall Lantern** HLS-750
STS Bead Blast
Acryl Lens, LED Lighting

CAR DESIGN

- Ceiling** CD-499C
(Barrisol, LED Lighting,
STS Mirror 3S Vibration)
- Car Wall** Marble (THASSOS)
3 Form Bear Grass (SEA WEED/19T)
LED Lighting System
STS Mirror 3S Vibration
- Car Door** STS Mirror 3S Vibration
- Operating Panel** Swing Panel
Micro Push Button
- Handrail** STS Bead Blast, LED Lighting
- Flooring** Marble (THASSOS)
STS Hairline (5T)



Information Display System (Car Wall)

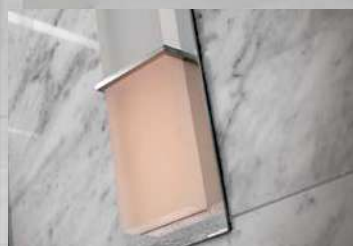

Hall Lantern



Arrival Announcement System



Ceiling



Handrail



Operating Panel Button



ENTRANCE

Landing Door Bonded Metal (Delta/Bronze)
Ti-Bronze 3S Vibration
High Glossy Coating

Jamb 200TYPE, Down Light
Ti-Bronze 3S Vibration
High Glossy Coating

Hall Button Destination Selecting
System (Box Type)

Hall Lantern STS Bead Blast
Half Mirror Acryl
LED Lighting

CAR DESIGN

Ceiling CD-529C
(Ti-Bronze Bead Blast,
LED Indirect Lighting)

Car Wall Marble (BROWNTINI)
3 Form Bear Grass (NIA)
LED Lighting

Car Door 3 Form Bear Grass (NIA)
Ti-Bronze Bead Blast

**Operating
Panel** Swing Panel
Micro Push Button

Handrail Ti-Bronze Hairline 1 Pipe

Flooring Marble
(BOTTICINO, BROWNTINI)



Information Display System & Lighting



Destination Selecting System



Hall Lantern



Information Display System & Car Doors



Ceiling



Handrail

Your decision
will be elevated
AFTER experiencing
THE EL


The high-class technologies of THE EL enhance buildings' value. The smart technology that enables outstanding operational performance and the green technology that considers the environment while ensuring efficiency is provided to you with great satisfaction.

THE EL offers everything demanded for ultra high speed elevators.

Experiencing the state-of-the-art technologies featured by THE EL will enable you to make a quicker, clearer decision.

Core
Advantage



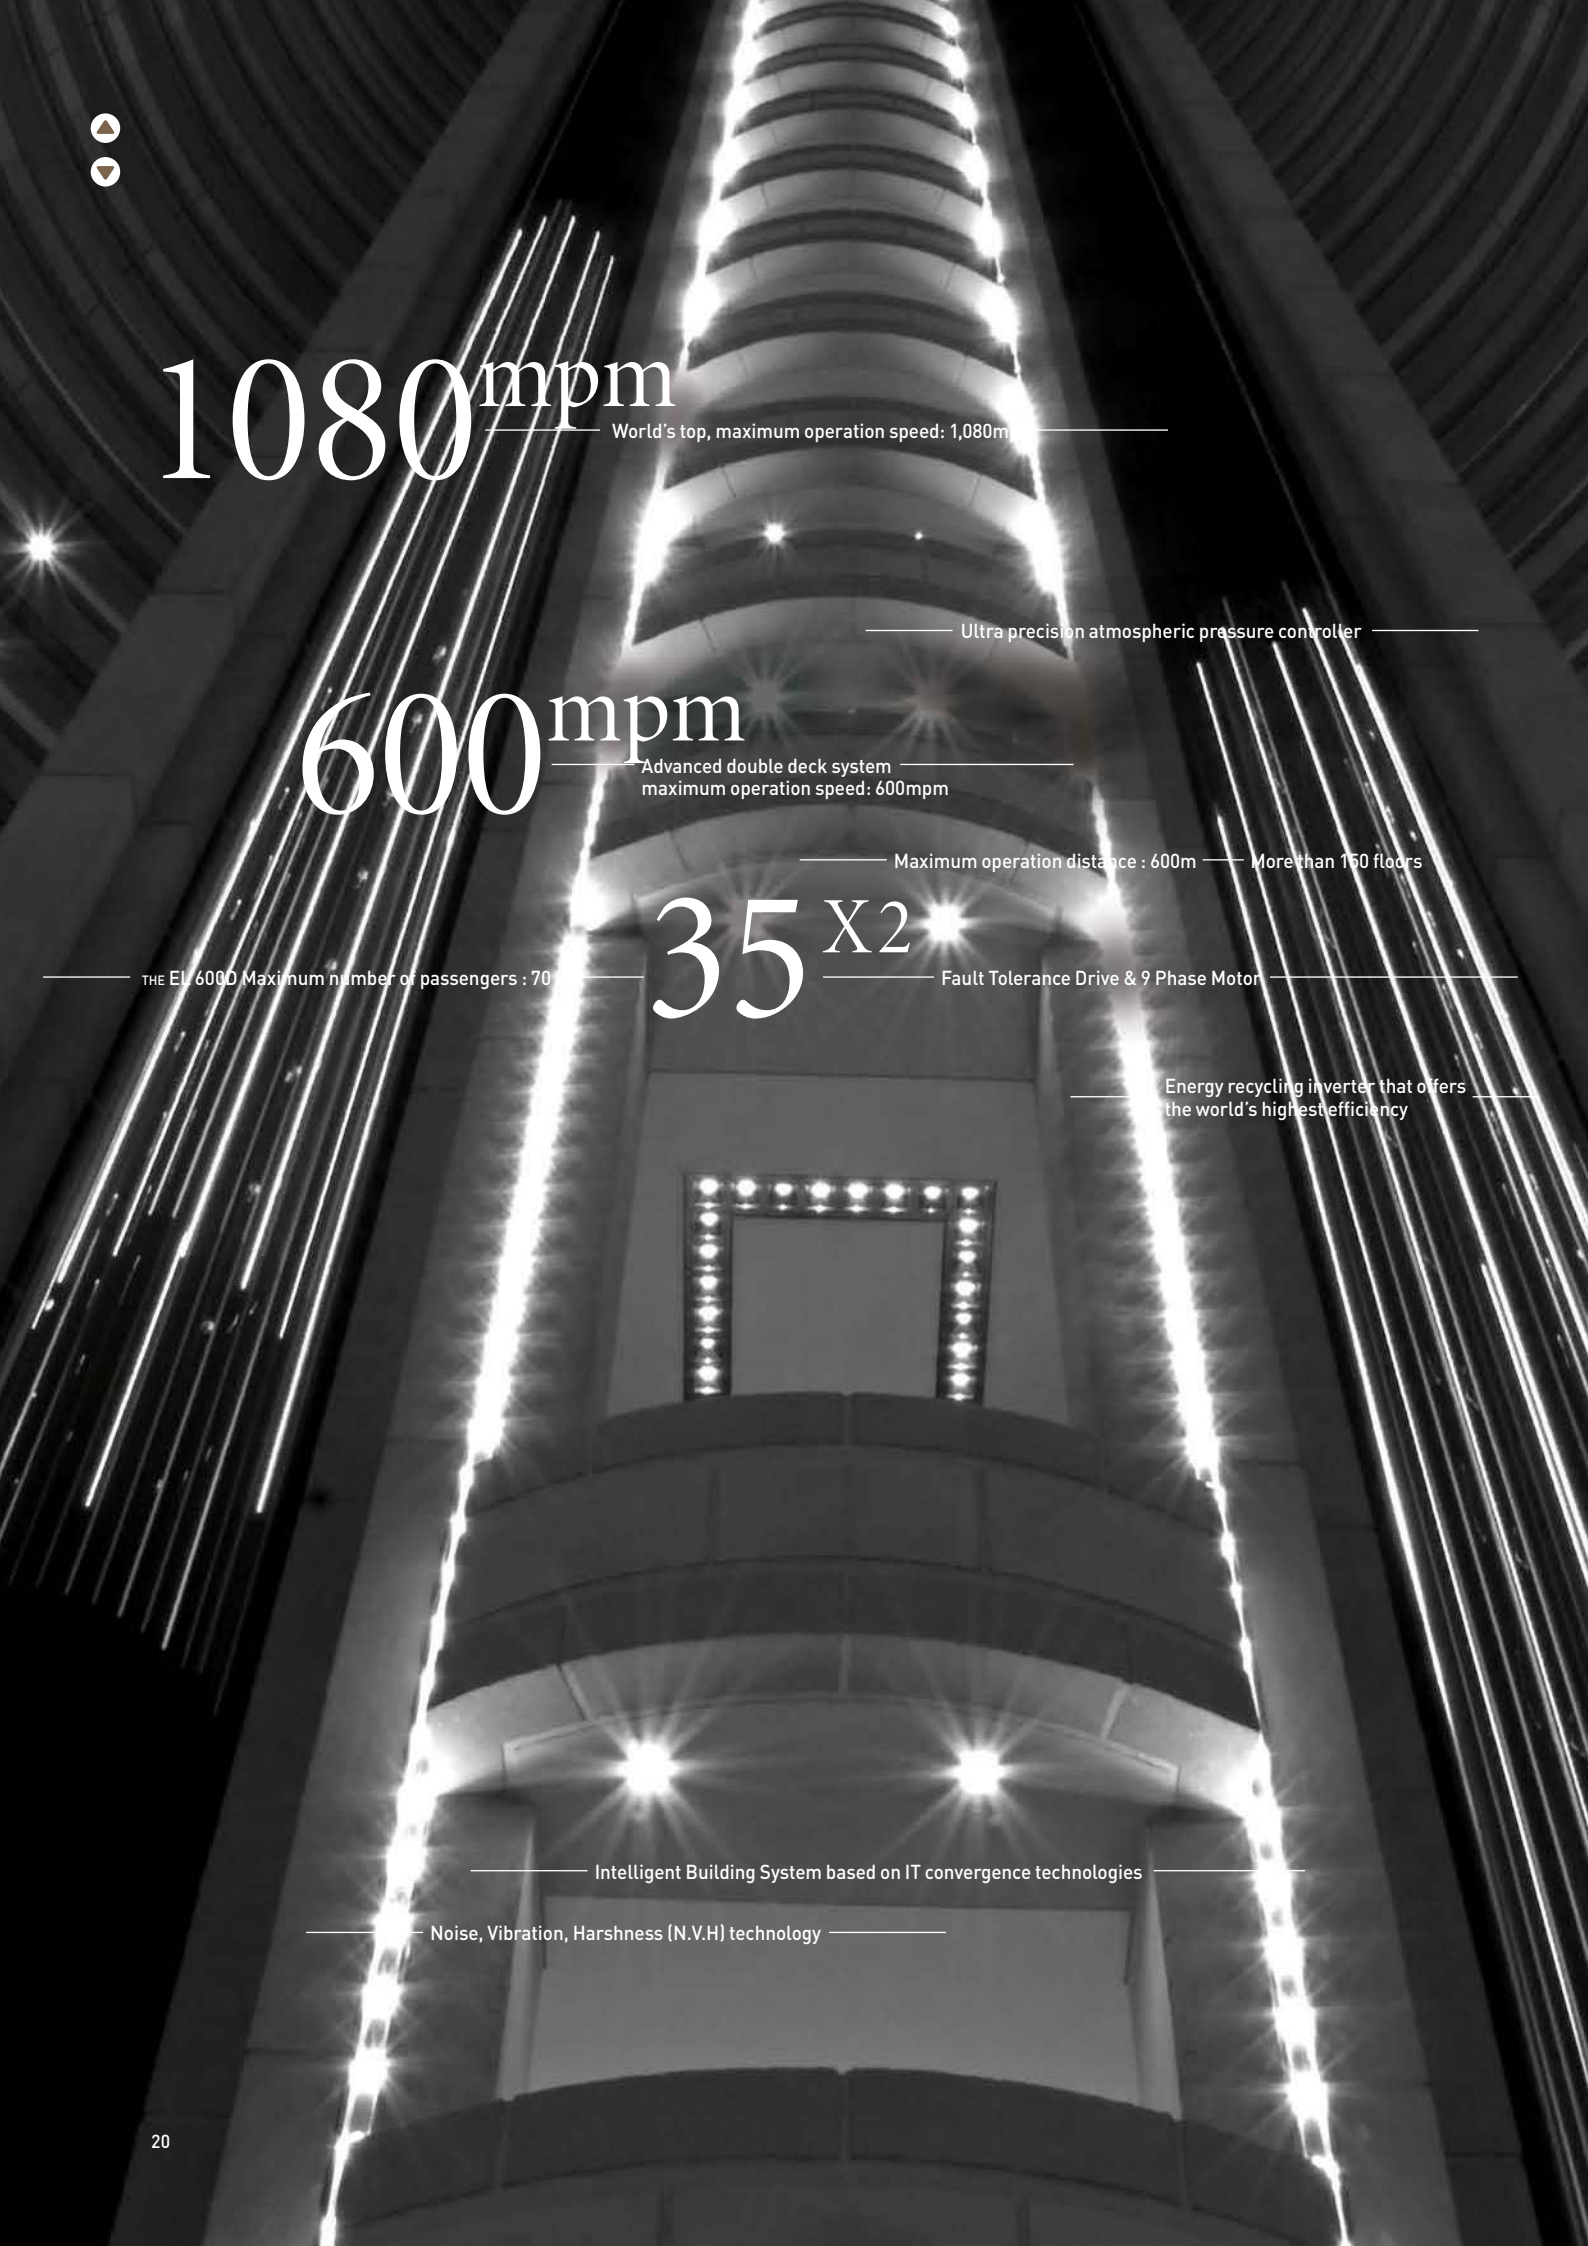

1080mpm

World's top, maximum operation speed: 1,080m

600mpm

Advanced double deck system
maximum operation speed: 600mpm

35X2

THE EL 6000 Maximum number of passengers : 70

Fault Tolerance Drive & 9 Phase Motor

Energy recycling inverter that offers
the world's highest efficiency

Ultra precision atmospheric pressure controller

Maximum operation distance : 600m More than 150 floors


Intelligent Building System based on IT convergence technologies

Noise, Vibration, Harshness (N.V.H) technology



THE EL,
an ultra high speed elevator
that was created with the world's
advanced technologies
These technologies result
in core advantages of THE EL,
providing you with greater value.

Category	Name	Function	
Machine structure	Ultra high speed nine-phase synchronous motor	Fault tolerance function	
	N.V.H system	Airtight car door system	Low noise, low vibration
		High-performance roller guide shoe	
		Vibration control system	
		Streamlined capsule cage	
	Atmospheric pressure controller	Minimization of ringing in the ears	
	Safety device	Emergency stop device	Excellent braking performance and shock absorber
		Fly ball governor	
		Three-stage telescopic buffer	
Operation system	IBS support system	Smart IT system (Bi-directional video telephony, mobile call, speed gate connection, etc.)	
	Destination Selecting System	Outstanding enhancement of operational efficiency	
	Artificial intelligence-based group control system		
	Remote monitoring and video telephony system	Prevention of crime and emergency situations	
	Advanced double deck system	Outstanding enhancement of operational efficiency	

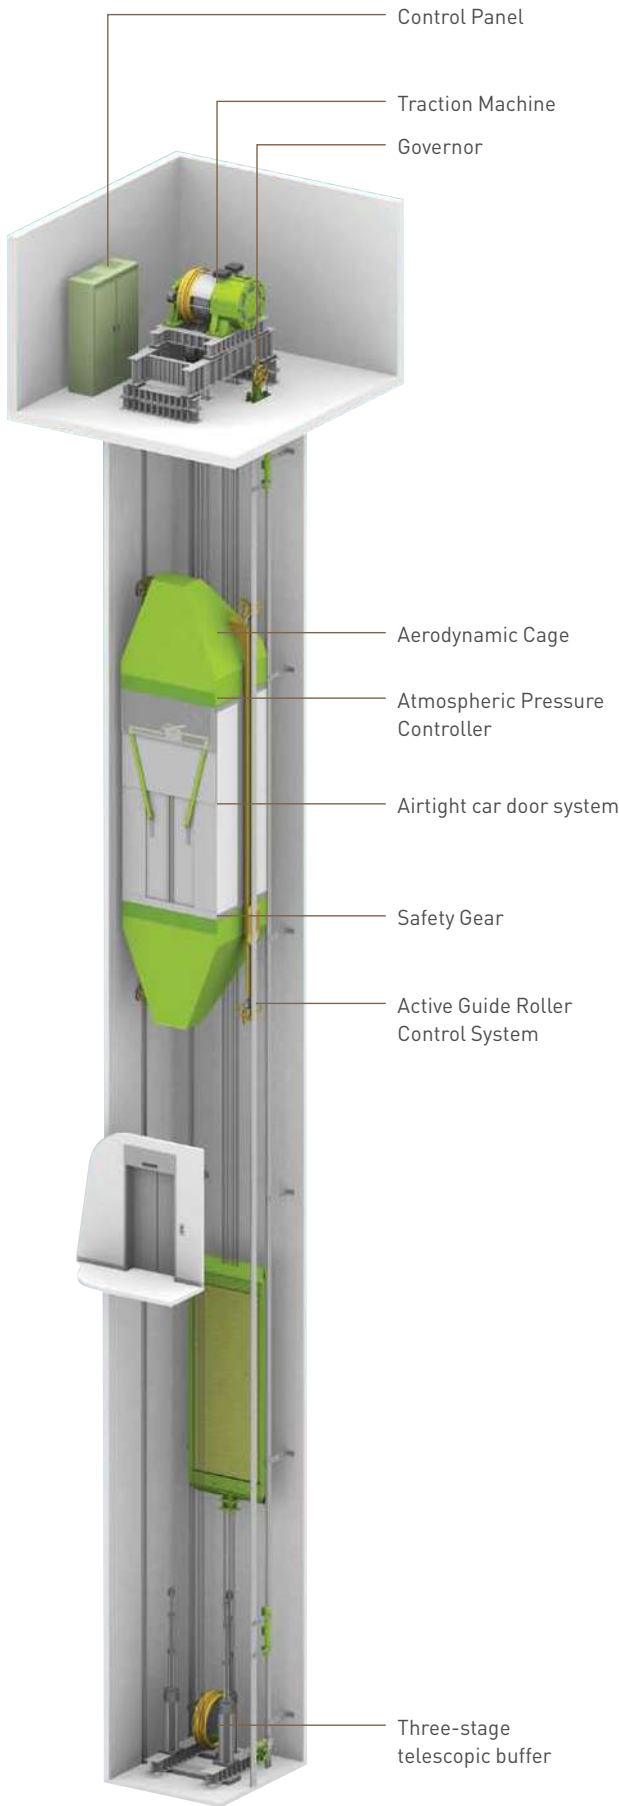



KEY FEATURES

The ultra high speed nine-phase synchronous motor, which demonstrates the world’s most outstanding traction power and is also very compact, a streamlined capsule design, and technologies that minimize noise and vibration... All the things mentioned above are in THE EL.

TRACTION MACHINE




Fault tolerance system

With a design that employs three three-phase permanent magnet synchronous motors in a single frame, the fault tolerance system is a key technology of THE EL that prevents breakdowns or out of service. Even when there is an issue with some parts, the other synchronous motors ensure normal operation.

Electro-magnetic field simulation test

By reviewing safety based on electro-magnetic field simulation and structural analysis, an elevator that is the quietest and has the lowest level of vibration in the world was created to offer greater value.

* Torque Ripple of no more than 0.1%, the lowest in the world

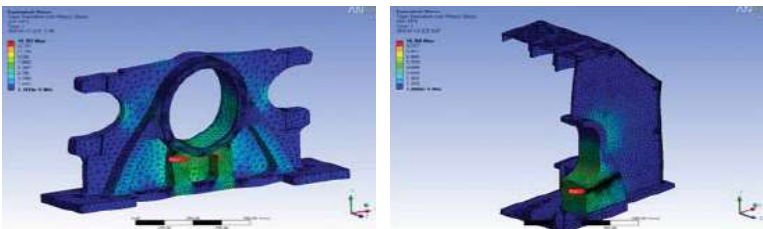


Structural analysis simulation in consideration of heavy load

Hydraulic brake


The high-capacity, hardened hydraulic brake is more compact than a magnetic brake and has excellent braking performance. This also allows for control that is as much as ten times more precise than regular braking.

	GT 350	GT 500	GT900(D/D)	GT 1000	GT 1500 (D/D)
Max. Rise (m)	200	300	400	600	600
Max. Capacity (kg)	2000	2000	3200	2000	4000
Max. Speed (mpm)	420	600	600	1080	600

Three-phase parallel control device The three-phase parallel control device maintains the independence of three synchronous motors and mutually connects them, and it has a highly efficient, high-capacity control board, resulting in outstanding shift quality and quietness.

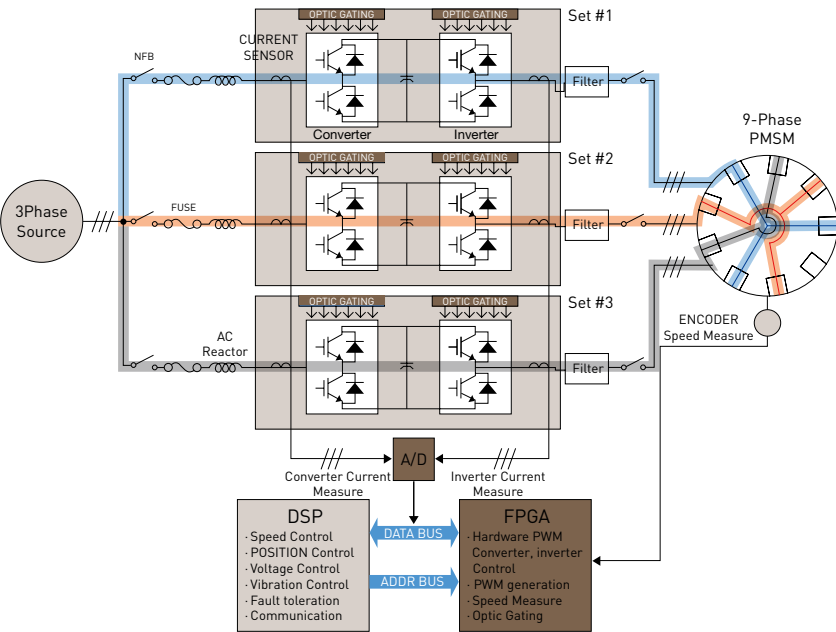


- * **EMI Filter:** Satisfies EMC standards (EN12015, EN12016, EN61000-4 etc)
- * **Nano Core:** Minimizes Common Mode Noise
- * **Micro Surge Filter:** Protects the motor, minimizes leakage current, reduces noise

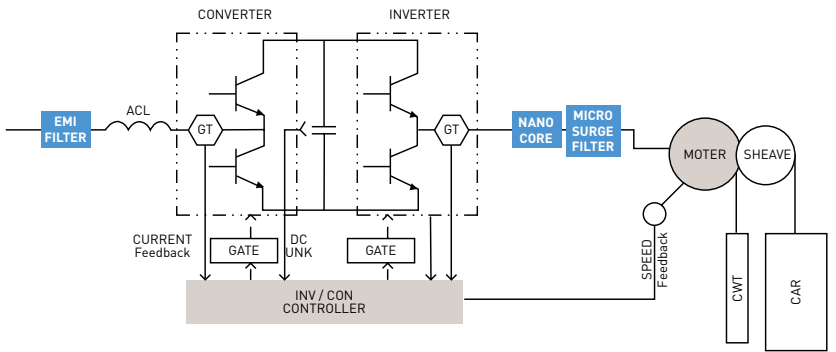



N.V.H SYSTEM

[NOISE, VIBRATION, HARSHNESS]

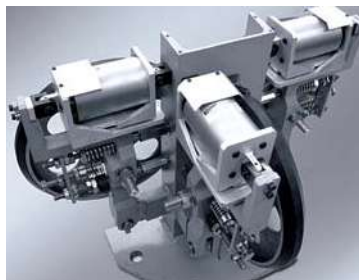

Airtight car door system After the door closes, it slides towards the cage. This completely seals the entrance, which is the main source of noise, resulting in excellent noise insulation and atmospheric pressure control.

High performance roller guide shoe The high elasticity roller and lever structure minimizes the transmission of external force from the rail to the inside of the car, ensuring optimal comfort during high speed operation.



Aerodynamic capsule cage The aerodynamic, streamlined capsule cage that was designed through flow analysis and simulation minimizes air resistance, resulting in a smooth riding experience with little noise and vibration.


Vibration control system The active guide roller control system reduces the lateral vibration within the car to less than 5gal. The longitudinal vibration control system uses a motor control device and reduces vibration by 40%.



ATMOSPHERIC PRESSURE CONTROLLER


Minimization of ringing in the ears By controlling the induction and exhaust system within the cage, the atmospheric pressure control system reduces air pressure fluctuation to within 5% inside the car. It maintains atmospheric pressure at a certain level, preventing the pressure change that would otherwise occur during ultra high speed operation. This allows the body to more easily adapt to the change, resulting in a comfortable riding experience.

[Change in the atmospheric pressure within the cage]

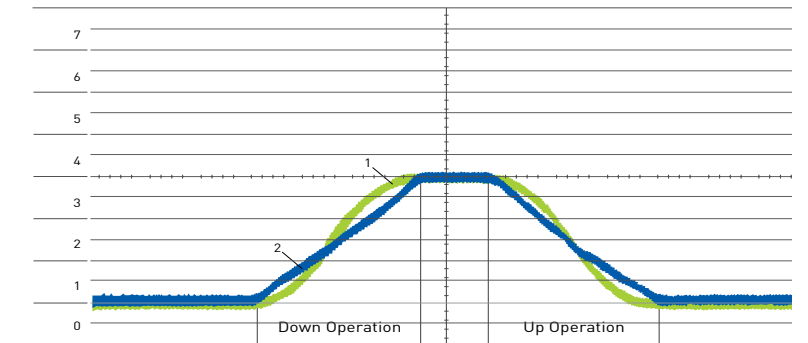


1, No-controlled atmospheric pressure 2, Controlled atmospheric pressure

MECHANICAL SAFETY COMPONENTS



Emergency stop device Attached to the bottom of the cage, this device grasps the guide rail like a wedge in the event of excessive speed, resulting in outstanding braking force. The special ceramic friction material can maintain frictional force even at high temperatures of more than 1000°C. It offers excellent braking performance and safety by its outstanding thermal resistance and durability.



Fly ball governor A fly ball governor detects abnormal speed and activates an emergency stop when necessary. Speed can be precisely measured even during ultra high speed operation, resulting in a level of safety that befits the elevator's class.



Three-stage telescopic buffer The three-stage telescopic buffer reduces shock to the car if the elevator were to descend below the lowest floor to the pit. The buffer can reduce the height in three stages, which improves the use of space with pit depth.



OPERATION SYSTEM

High efficiency and security are both offered by the double deck system maximizing transport efficiency, the destination floor reservation system, the mobile call system that features the latest technologies, and the remote monitoring system.


INTELLIGENT BUILDING SYSTEM



The IBS support system connects the building's management systems and information technologies to create a smart spatial culture. It provides optimal services and systems of the kind expected of a cutting-edge building based on various information technologies, including bi-directional video telephony, mobile calling, speed gate connection and operation, handwritten enabled OPB(Operating Panel Board), and crime prevention system.

DESTINATION SELECTING SYSTEM

(DESTINATION FLOOR RESERVATION SYSTEM)


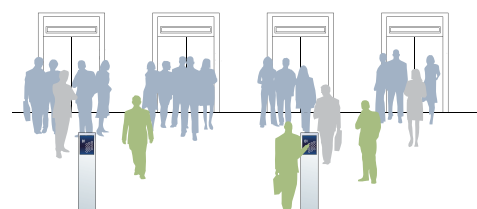


This is a system where you register a destination floor at a landing. The most appropriate elevator is automatically selected. In addition to reducing passenger wait time and unnecessary operation, it enables maximum energy saving.

ARTIFICIAL INTELLIGENCE-BASED GROUP CONTROL SYSTEM

(IGC-3000)

Artificial intelligence-based analysis of elevator traffic volume allows the system to learn weekly traffic volume and patterns. This enables optimal group management and efficient operation of several elevators.

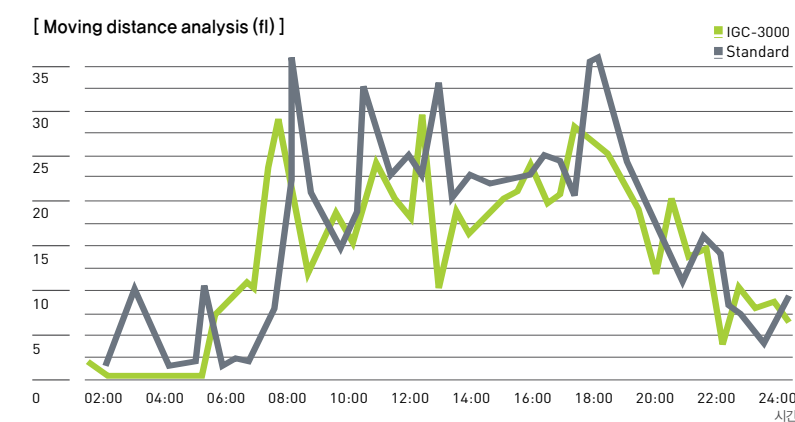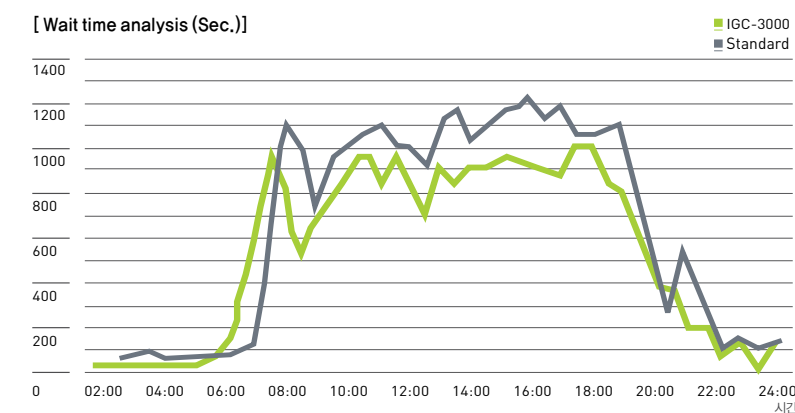



REMOTE MONITORING AND VIDEO TELEPHONY SYSTEM

Terminals on control panels that are used for collecting and analyzing operation data allow remote real-time monitoring of the operation of elevators across the nation. This prevents breakdowns and accidents. The video telephony system is used to determine the status inside cars through the customer center. This system prevents crime and accidents caused by emergency situations.






ADVANCED DOUBLE DECK SYSTEM

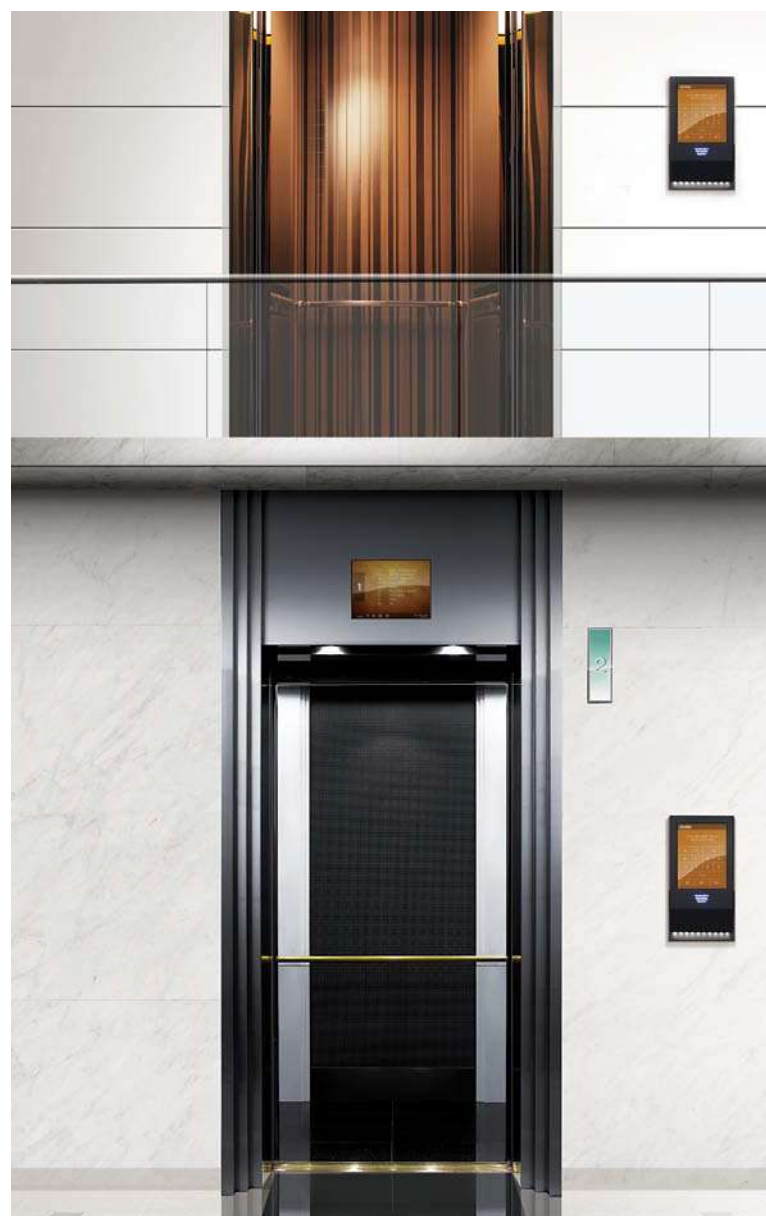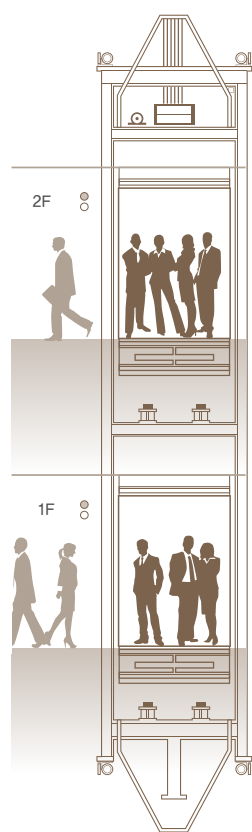

Higher transport efficiency Two elevators connected vertically are simultaneously run to offer 1.8 times greater transport capability. Fewer hoistways mean lower construction costs and more available floor space.

Streamlined capsule design An aerodynamic capsule design that is applied to airplanes was adopted to minimize air resistance for a smooth riding experience with low noise and vibration.


[Floor distance adjustable device]



This enables the adjustment of the floor distance between the higher and lower cage. Varying floor heights are accommodated to enable more latitude in building design.

(Hyundai Asan Tower: Floor distance is adjustable up to 7m)

[Three modes of operation of the double deck system]

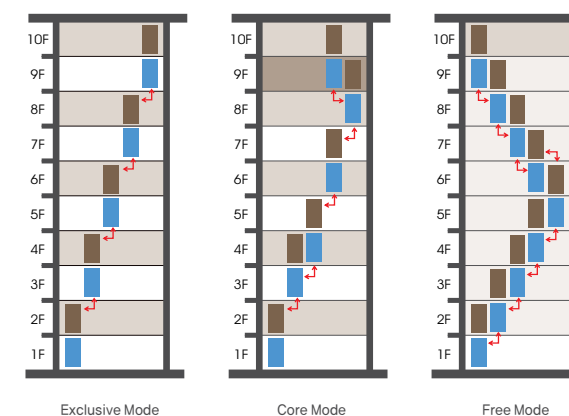

The system can be flexibly operated in one of three modes – Exclusive, Core, Free – depending on building characteristics or traffic volume.

Exclusive Mode A typical approach based on odd number floor/even number floor operation

Core Mode Top and bottom deck service is enabled for specific floors

Free Mode The bottom deck services all floors except for the very top floor, while the top deck services all floors except for the very bottom floor





PERFORMANCE

Hyundai Elevator is there for a new ultra high rise building that becomes the latest and greatest landmark in the city.
THE EL is the only elevator that can provide top speed and performance for your ultra high rise building.



BIFC
(63 FL.)

Busan, Korea
Speed : 600m/min (2units)
540m/min (3units)
480m/min (8units)
Total : 46units



Park-Hyatt Hotel
(34 FL.)

Busan, Korea
Speed : 360m/min (2units)
Total : 11units



I-SET Tower
(30 FL.)

Ekaterinburg, Russia
Speed : 360m/min(2units)
210m/min(1units)
Total : 6units



Hilton Panama City Hotel
(53 FL.)

Panama City, Panama
Speed : 240m/min (8units)
Total : 31units



Songdo I-Tower
(33 FL.)

Incheon, Korea
Speed : 360m/min (2units)
Total : 18units



Kepco Company Building
(31 FL.)

Naju, Korea
Speed : 300m/min(6units)
240m/min(5units)
Total : 26units



Rivage Tower
(68 FL.)

Panama City, Panama
Speed : 240m/min (4units),
180m/min (1units)
Total : 5units



Hanoi Landmark Tower
(72 FL.)

Hanoi, Vietnam
Speed : 240m/min (2units),
210m/min (10units)
Total : 29units



Venezuela Centro Simon Bolivar
(56 FL.)
(Government Complex)

Caracas, Venezuela
Speed : 480m/min (2units),
420m/min (4units),
360m/min (2units)
Total : 15units



Lerthai Center
(29 FL.)

Shijiazhuang, China
Speed : 360m/min (4units),
210m/min (4units),
180m/min (2units)
Total : 10units




Panama F&F Tower (55 FL.)

Panama City, Panama
Speed : 240m/min (5units)
Total : 5units



Varyap Meridian Hotel
(58 FL.)

Istanbul, Turkey
Speed : 240m/min (7units),
210m/min (5units)
Total : 53units

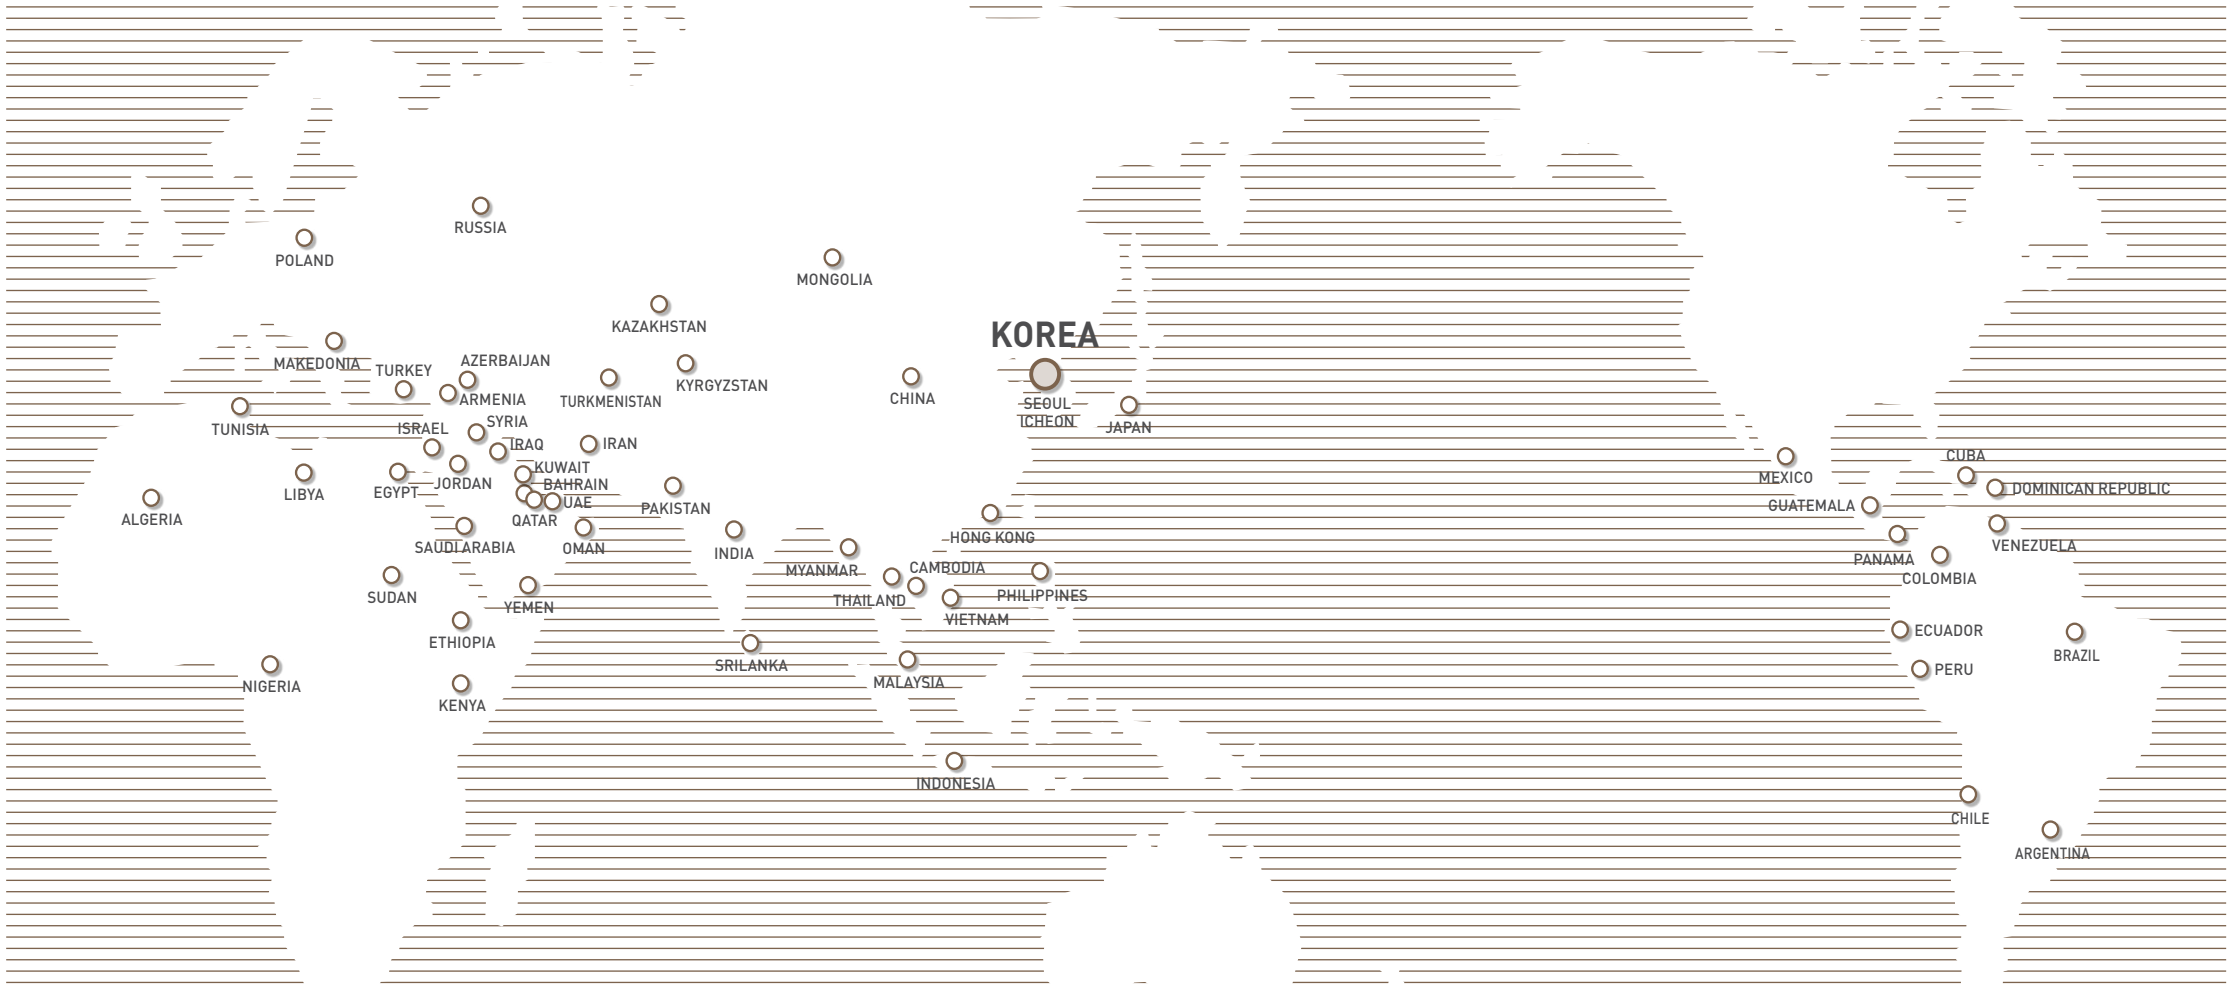

International Sales & Service Network

AFRICA

ALGERIA
Tel : 213-21-27-62-45
E-mail : xeletec.sarl@gmail.com

EGYPT
Tel : 20-1-066628331
E-mail : overseas@iet-hyundaelevator.com

ETHIOPIA
Tel : 251-911-851313
E-mail : ieethiopia1@gmail.com

KENYA
Tel : 254-722-667984
E-mail : lyall@skytectelevators.com

LIBYA
Tel : 218-91-735-0745
E-mail : info@lec_hyundaelevator.com

NIGERIA
Tel : 234-803-7352222
E-mail : nicolas@orionelevators.com

SUDAN
Tel : 249-183-230-384
E-mail : gais_khaled@yahoo.com

TUNISIA
Tel : 216-71-886-980
E-mail : ideal.commercial@gnet.tn

ASIA

CAMBODIA
Tel : 855-90-216-490
E-mail : khleea7@gmail.com

CHINA
[Head Office(Factory)]
Tel : 86-21-6485-8600
E-mail : 2017407@hdel.co.kr

HONG KONG
Tel : 86-755-2585-5903
E-mail : hyundaisz@naver.com

INDIA
Tel : 91-20-3250-2190
E-mail : mmotwani@kcl.kineticindia.com

INDONESIA
Tel : 62-21-631-8444
E-mail : helindo@dnet.net.id

JAPAN
Tel : 81-3-3436-5117
E-mail : kodaund@daiko-s.co.jp

MALAYSIA
Tel : 603-6733-2999
E-mail : brian.lee@hem.com.my

MONGOLIA
Tel : 976-11-7015-3333
E-mail : ch-highig@yahoo.com

MYANMAR
Tel : 09-400-444598
E-mail : info@integral-ltd.com

PHILIPPINES
Tel : 632-716-0905
E-mail : hyco@pltdsl.net

SRILANKA
Tel : 94-11-2629208
E-mail : rienzie@abansgroup.com

THAILAND
Tel : 660-2348-8047
E-mail : kritchawachb@loxley.co.th

VIETNAM
Tel : 84-4-6282-2978
E-mail : sbpark@hdel.co.kr

EUROPE & CIS

ARMENIA
Tel : 971-4-440-49-27
E-mail : natalya@fd-jcb.am

AZERBAIJAN
Tel : 994-12-555-1744-46
E-mail : office@astexnika.com

KAZAKHSTAN
Tel : 7-717-253-8072
E-mail : dmitriy@hdel.kz

KYRGYZSTAN
Tel : 996-312-474205
E-mail : a918882@hotmail.com

MAKEDONIA
Tel : 90-216-488-8000
E-mail : hakan.ek@hmf.com.tr

POLAND
Tel : 48-61-820-8551
E-mail : mailto:maciej.dziurkiewicz@omilifts.com

RUSSIA [Moscow]
Tel : 7-495-514-00-32
E-mail : mastersverlift@gmail.com

[Vladi]
Tel : 7-423-222-98-73
E-mail : Kirienkoboris@hotmail.com

TURKEY
Tel : 90-216-488-8000
E-mail : hakan.ek@hmf.com.tr

TURKMENISTAN
Tel : 993-12-2287-93
E-mail : doganlarhk@hotmail.com

MIDDLE EAST

BAHRAIN
Tel : 973-17702468
E-mail : elevators@nassgroup.com

IRAN
Tel : 98-21-8869-8727-36
E-mail : jafari_hyundai@yahoo.com

IRAQ
Tel : 964-7901336498
E-mail : arjoon_co@yahoo.com

ISRAEL
Tel : 972-3-9630000
E-mail : elib@ledico.com

JORDAN
Tel : 962-79-5526-713
E-mail : m_bseiso@orange.jo

KUWAIT
Tel : 965-22-457-925
E-mail : info@deal-trade.com

OMAN
Tel : 968-9286-4334
E-mail : helcomct@gmail.com

PAKISTAN
Tel : 92-21-34320601-5
E-mail : iitcpk@gmail.com

QATAR
Tel : 974-436-6689
E-mail : hmqtar@yahoo.com

SAUDI ARABIA
Tel : 966-12-6683555
E-mail : yaldram@nsc-ksa.com

SYRIA
Tel : 963-933-234134
E-mail : terzian@scs-net.org

UAE
Tel : 971-4-294-4475
E-mail : dubai@bhnoe-hyundai.com

YEMEN
Tel : 967-1-450556
E-mail : waha62@hotmail.com

NORTH/SOUTH AMERICA

ARGENTINA
Tel : 5411-3220-2878
E-mail : oqueta@skylift.com.ar

BRAZIL
[Head office(Factory)]
Tel : 55-11-9922-61579
E-mail : jhjean@hdel.co.kr

[Wolk]
Tel : 55-81-3271-6273
E-mail : roberto@hyundaiwolll.com.br

CHILE
Tel : 56-2-2635-3394
E-mail : lcld@cyce.cl

COLOMBIA
Tel : 57-4-444-9297
E-mail : sgirardo@solucionesverticales.com.co

CUBA
Tel : 537-699-3412
E-mail : habanajdkim@gmail.com

DOMINICAN REPUBLIC
Tel : 809-566-7474
E-mail : cesar@eleva.com.do

ECUADOR
Tel : 593-2254-2831
E-mail : ascensorhyundai@yahoo.com

GUATEMALA
Tel : 502-2388-0000
E-mail : cd.elevatec@grupomisol.com

MEXICO
Tel : 52-55-5379-7418
E-mail : yurich@insertechmx.com

PANAMA
Tel : 507-230-3166
E-mail : asucre@elevadoresdelistmo.com

PERU
Tel : 51-1-436-1028
E-mail : yho7777@gmail.com

VENEZUELA
Tel : 58-212-232-8263
E-mail : ojssimon@gmail.com

HEAD OFFICE & FACTORY

2091, Gyeongchungdero, Bubal-eup, Icheon-si, Gyeonggi-do, 467-734, Korea
TEL 82_2_3670_0715/0667 FAX 82_2_3672_8763~4

SEOUL OFFICE (INT'L SALES DIV.)

9F, East Bldg., Hyundai Group Bldg., 194, Youlgok-ro, Jongno-gu, Seoul, 110-754, Korea
TEL 82_2_3670_0715/0667 FAX 82_2_3672_8763~4

We reserve the right to change designs and specifications for the product development without prior notice. Copyright © HYUNDAI ELEVATOR CO., LTD. All rights reserved.
Printed in Korea. HET-E0306/2014.09/3rd edition

Prize & Certification



VDI 4707
A class of the TÜV, German



ISO 9001
Quality System Certification



ISO 14001
Environmental System Certification



OHSAS 18001:2007
Safety System Certification



Excellent Service Quality
Certification



CE Mark



GD Mark
Good Design Certification



Korea Certification



UL mark
Underwriter's Laboratories Certification



GMS
Green Management System Certification



K-BPI
Korea Brand Power Index

Brand Line up



Ultra High Speed
Speed 1080mpm
Rise 600m



High Speed
Speed 240mpm
Rise 200m



Middle-Low Speed
Speed 180mpm
Rise 150m



Machine Room-less
Speed 210mpm
Rise 120m



High Rise

Mid Rise

Low Rise

Hyundai Elevator offers a lineup that is best for customers' various designs.